


WAŻ LABORATORYJNY

Rolka 25 m.

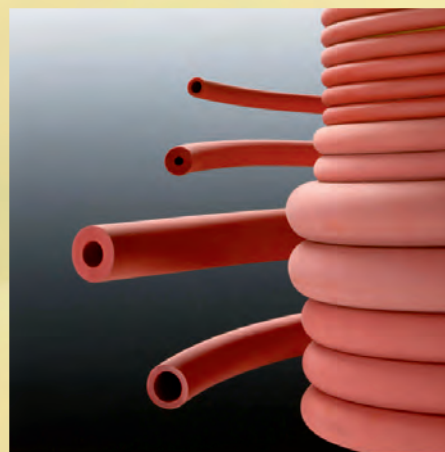

numer katalogowy	φ wew. [mm]	φzew. [mm]	grubość ścianki [mm]
D&N301 0204	2	4	1
D&N301 0305	3	5	1
D&N301 0306	3	6	1,5
D&N301 0406	4	6	1
D&N301 0407	4	7	1,5
D&N301 0408	4	8	2
D&N301 0508	5	8	1,5
D&N301 0509	5	9	2
D&N301 0609	6	9	1,5
D&N301 0610	6	10	2
D&N301 0710	7	10	1,5
D&N301 0711	7	11	2
D&N301 0812	8	12	2
D&N301 0913	9	13	2
D&N301 1014	10	14	2
D&N301 1217	12	17	2,5
D&N301 1319	13	19	3
D&N301 1420	14	20	3
D&N301 1521	15	21	3
D&N301 1622	16	22	3
D&N301 1824	18	24	3
D&N301 2028	20	28	4
D&N301 2533	25	33	4

**WAŻ LABORATORYJNY NR**

Do pracy w próżni. NR - kauczuk naturalny, kolor czerwony, twardość wg Shore A 50

numer katalogowy	φ wew. [mm]	φzew. [mm]	grubość ścianki [mm]
D&N302 0309	3	9	3
D&N302 0412	4	12	4
D&N302 0513	5	13	4
D&N302 0515	5	15	5
D&N302 0612	6	12	3
D&N302 0614	6	14	4
D&N302 0616	6	16	5
D&N302 0618	6	18	6
D&N302 0715	7	15	4
D&N302 0717	7	17	5
D&N302 0816	8	16	4
D&N302 0818	8	18	5
D&N302 0820	8	20	6
D&N302 0824	8	24	8
D&N302 1016	10	16	3
D&N302 1020	10	20	5
D&N302 1026	10	26	8
D&N302 1030	10	30	10
D&N302 1222	12	22	5
D&N302 1228	12	28	8
D&N302 1531	15	31	8

